




WORRY FREE
APPLICATIONS
GUARANTEED

MAZOL



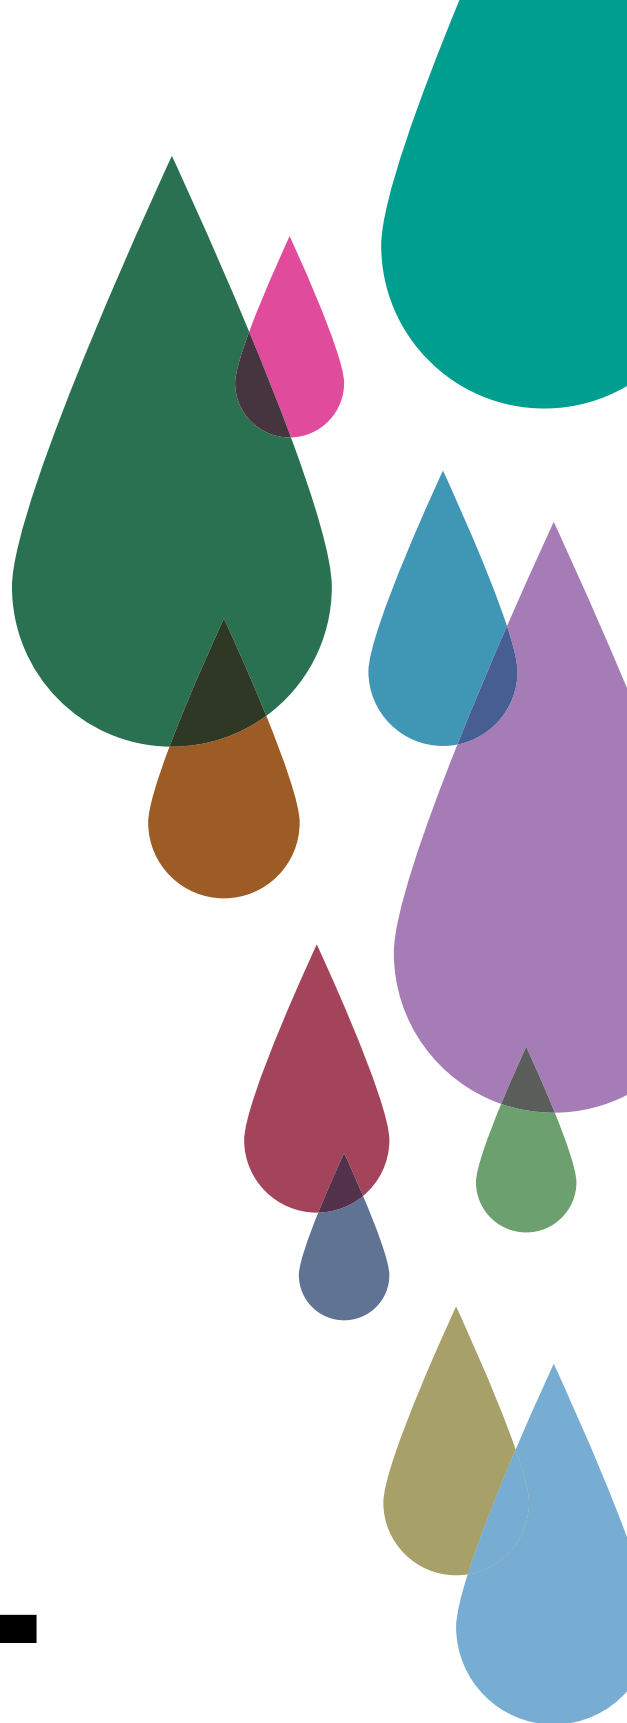


ABOUT US









Long lasting is slowly becoming a lesser used word by many companies. Quality has taken the back seat and has given preference to quantity. At Mazol Chemicals, quality is our cornerstone of the business. Quality becomes even more important when you deal in complex products like Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various applications like grouting, fixing tiles, waterproofing. If your demand is quality product, Mazol Chemicals is the right brand for you.

ISO 9001:2015 CERTIFIED COMPANY

INDEX

TILE ADHESIVES

	MZ-08	09
	MZ-22	11
	MZ-42	13
	MZ-77	15
	MZ-101	17
	BLOCK JOINTING	19
	TILE GROUT	21
	GOLDEN TILE GROUT	23
	EPOXY GROUT	25

	GROUT ADMIX	27
	CEM BOND AW+ 111	29
	SBR LATEX 555	31
	TILES CLEANER	33
	TILE SPACER	34
	TILE LEVELLING KIT	34
	TROWEL	34
	CLIP AND WEDGES	34


TILE ADHESIVE

Applications

Our products are designed in a way to suit both indoor and outdoor applications. Our complex chemical mixtures ensure you have long lasting applications and peace of mind.



Floor Tiles

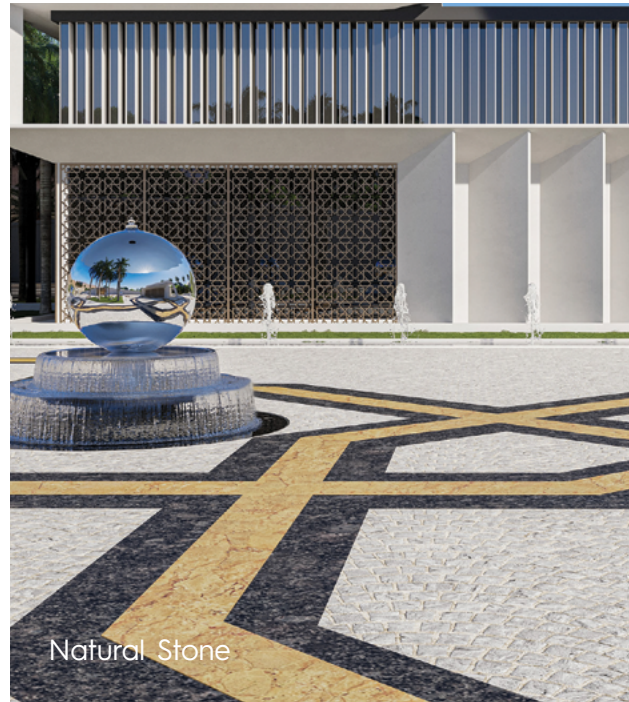

Natural Stone



Outdoor Tiles



Large Scale Tiles



Wall Tiles

TILE ADHESIVE



MZ-08

Packaging 20kg

Tile fixing adhesive for internal floor applications.

PRODUCT DETAILS

MZ-08 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult Mazol Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

PRODUCT FEATURES

1. Type 1
2. Suitable for internal floor use
3. Ready to mix
4. High strength
5. Polymer modified adhesive

TILE ADHESIVE



MZ-22

Packaging 20kg

Tile fixing adhesive for internal wall & floor applications.

PRODUCT DETAILS

MZ-22 is a grey, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult Mazol Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

PRODUCT FEATURES

1. Type 1
2. Suitable for internal & external use
3. Ready to mix
4. Fixes tiles over tiles
5. High strength
6. Polymer modified adhesive

TILE ADHESIVE



MZ-42

Packaging 20kg

Tile fixing adhesive for internal wall & floor applications.

PRODUCT DETAILS

MZ-42 is a white, high polymer modified, cement-based tile adhesive which is suitable for fixing tiles, natural stones, Vitrified tiles in interior and exterior situations. Consult Mazol Chemicals regarding use of a higher performance adhesive for applications in difficult and demanding situations.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

PRODUCT FEATURES

1. Type 2
2. Suitable for internal & external use
3. Ready to mix
4. Fixes tiles over tiles
5. High strength
6. Polymer modified adhesive

TILE ADHESIVE



MZ-77

Packaging 20kg

Tile fixing adhesive for internal & external wall & floor applications.

PRODUCT DETAILS

MZ-77 is a cement-based adhesive for wall and floor tiles. Suitable for fixing tiles and natural stones in interior and exterior situations which includes swimming pools. This is ideal for fixing tile on tile.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

PRODUCT FEATURES

1. Type 2
2. Suitable for internal & external use
3. Ready to mix
4. Fixes tiles over tiles
5. Recommended for low porosity tiles etc
6. High strength
7. Polymer modified adhesive

TILE ADHESIVE



MZ-101

Packaging 20kg

Tile fixing adhesive for internal & external wall & floor applications.

PRODUCT DETAILS

MZ-101 is a premium, water & frost resistant, highly polymer modified cementitious wall and floor tile adhesive specially formulated for fixing mosaic tiles ceramic, glass mosaic etc. It is also suitable for fixing ceramic, vitrified wall & floor tiles, metal or glass tiles, marble, granite, quartz stone, terrazzo and other natural stone in interior and exterior locations which includes use in swimming pools. This is ideal for fixing tile on tile.

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of the surface and the method of application but at 3mm thickness it is approx. 55-60 sq. ft. per 20kg bag when using a thin-bed trowel. For good coverage, it is important that all surfaces should be clean, smooth, plumb, level and free from defects & undulations.

PRODUCT FEATURES

1. Type 3
2. Suitable for internal & external use
3. Ready to mix
4. Fixes tiles over tiles
5. Excellent water and frost resistance
6. Suitable for swimming pool
7. Recommended for quartz stone, quartz marble, granite & low porosity tiles etc
8. High strength
9. Polymer modified adhesive

ADHESIVE



BLOCK JOINTING

Packaging 40kg

Material for joining AAC blocks

PRODUCT DETAILS

Mazol Block Jointing is a factory prepared blend of carefully selected raw materials, portland cement, graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar ideal for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness that meet and exceed the requirements of National and International Standards.

APPLICATIONS

For interior and exterior use for preparing thin bed block mortar for AAC and cellular concrete blocks.

ADVANTAGES

1. Long working time
2. No curing required after block work is done
3. Improved adhesion between two blocks
4. Fast & economical

COVERAGE

Approximately 100-130sq.ft. per 40kg bag. Coverage is based on smoothness and evenness of the substrate, size of blocks used and the thickness of mortar used. A general guideline for coverage of mortar is given when used with 25% water added to powder.

Note: Coverage is based on the block size of 600mm* 200mm* 100mm

GROUT



TILE GROUT

Packaging 500g | 1kg

One pack water resistant tile grout

PRODUCT DETAILS

Mazol Tile Grout is a high quality fine, polymer modified, water-resistant, cement - based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc.

(Note: where chemical resistance is hygienic and sterile, it is important use Epoxy Grout)

SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COLORS



White



Pink



B. Beige



Ivory



Jaisalmer



Grey



Black



C. Brown



S. Blue



O. Green



R. Brown



V. Terracotta

GROUT



GOLDEN TILE GROUT

Packaging 1kg

One pack water resistant tile grout and mild acid-proof

PRODUCT DETAILS

Mazol Golden Tile Grout is a high quality fine, high-polymer modified, high performance Golden Tile Grout with excellent water-resistance, efflorescence resistance designed for grouting glazed tiles / mosaics, vitrified & fully vitrified tiles, ceramic tiles, industrial tiles, granites, marbles & other natural stones etc. Golden Tile Grout has higher strength, is water and stain resistant compared to normal cement grout.

SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COLORS



White



Black



Ivory



C. Brown



Grey

GROUT



EPOXY GROUT

Packaging 1kg | 5kg

Stain free grout for floor & wall (3 Part)

PRODUCT DETAILS

Mazol Epoxy is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition.

TECHNICAL SPECIFICATION

Joint Width	Pot Life @27+-2C*	Cure @27+-2C*	Temperature Resistance	Water Absorption	Specific Gravity
2-20mm	45 minutes	48 hours	Prolonged - 30C* to 150C* Intermittent	Nil(1)	1.75
				Tensile Adhesion (14 days air)	
				Dry condition	Wet condition
Epoxy Grout				>4.5kn	>3.6kn
BS 5980:1980				0.95	0.56
(2)					

RECOMMENDED FOR

- Ceramic wall & floor tiles
- Quarry tiles
- Marble
- Mosaics
- Stone
- Pavers
- Slate
- Porcelain tile/Vitrified tile

ADVANTAGES

- Stain free
- Color fast
- Easy to install and clean
- Water cleanable when fresh
- Non-cracking or powdering
- Anti-bacterial and annti-fungal
- Chemical and temprature resistant
- Available in range of 50 colors



GROUT



GROUT ADMIX

Packaging 200ml

For better strength of grout

PRODUCT DETAILS

Mazol Grout Admix is specially designed latex admix to be used with sanded & unsanded grout.

APPLICATIONS

It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

BENEFITS

1. Colour-fastness
2. Flexibility
3. Compressive strength
4. Shock and chemical resistant
5. Reduces water absorption
6. Easy to clean

COVERAGE

Varies as per application.

WATERPROOFING



CEM BOND AW+ 111

Packaging 200ml | 1ltr | 5ltr | 20ltr

Integral liquid water proofing compound for concrete & plaster (Add mixture)

PRODUCT DETAILS

Mazol Cem Bond AW+111 is a specially formulated integral liquid waterproofing compound composed of surface active plasticising agents, polymers & additives. It is used as an additive for cement concrete, mortar & plasters. It makes concrete cohesive and prevents segregation.

APPLICATIONS

Areas of application waterproofing of concrete and sand-cement mortars used in

1. Basements
2. Roof slabs and screeds
3. Water tanks & water retaining structures
4. External plastering
5. Bathrooms and balconies
6. Sumps and drains

SHELF LIFE & STORAGE

Shelf life is 12 months from the date of Manufacturing in unopened condition. Store in a cool & dry place.

DOSAGE

100 to 300 ml per 50 kg bag of cement.

METHOD OF APPLICATION

1. Charge cement & aggregates to concrete mixer as per the mix design, mix in dry state for 1-2 minutes.
2. Start addition of 75-80% mixing water & mix for 2-3 minutes.
3. Mazol Cem Bond AW+111 is added as per the recommended dosage into the remaining mixing / gauging water, then add to concrete mixer & mix for another 2 minutes.
4. Place the concrete or apply plaster, as needed.
5. Cure the applied mortar or concrete as per good construction practices.

WATERPROOFING



SBR LATEX 555

Packaging 250g | 1kg | 5kg | 20kg

SBR Latex for
waterproofing & repairs

PRODUCT DETAILS

Mazol SBR Latex 555 is a highly potent and versatile SBR based liquid for high performance applications in waterproofing and repairs.

APPLICATIONS

1. Type - Styrene Butadiene Polymer Liquid
2. Color - White
3. Specific Gravity - 1.02 + 0.02
4. Storage Condition - Free from frost
5. Solid Content - 44 + 1 %
6. For best result - Use before 1 year if unopened Consumption -
1kg of Mazol SBR Latex 555 will cover 70 - 80 sq. ft. area in 2 coats for
a proportion mix 1:4:7 (Mazol SBR Latex 555 : Water : Cement)

TILES CLEANER



TILES CLEANER

Packaging 500ml | 1ltr

Heavy duty tiles cleaner

PRODUCT DETAILS

Mazol Tiles Cleaner is a powerful, heavy duty, acid-based cleaner for ceramic & vitrified tile - wall & floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

AREAS OF APPLICATIONS

1. Interior & Exterior
2. Wall & Floor

BENEFITS

1. Powerful formula
2. Fast acting
3. Easy to apply
4. Removes cement film
5. Remove efflorescence and most oxide stains.

NOTE

Do not use on surface that are not resistant to acid such as Natural stones, Terrazzo and CP Fittings.

TILES ACCESSORIES

TILE SPACER


Available in 2, 3, 4, 5, 6, 8 and 10mm



TILE LEVELER TOOL



TROWEL

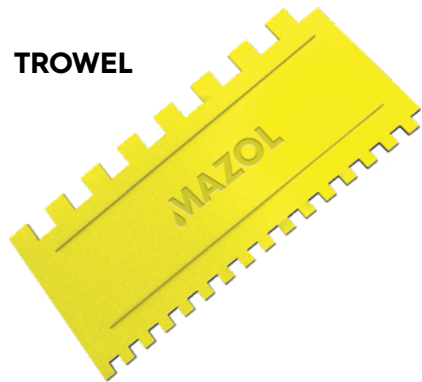

CLIP AND WEDGES





Customer care

97267 33337

Mfg. & Mkt. by:

Mazol Chem

Morbj, Gujarat, INDIA.

Email : mazolchem@gmail.com

Web : www.mazolchem.com

Disclaimer: The product information & application details given by the company & its agents has been provided in good faith & meant to serve only as a general guideline during usage. Users are advised to carry out taste & take trails to ensure on the suitability of products meeting their requirement prior to full scale usage of our products. Since the correct identification of the problems, quality of other materials used and the on-site workmanship are factors beyond our control, there are no expressed or implied guarantee / warranty as to the result obtained. The company does not assume any liability or consequential damage for unsatisfactory results, arising from the usage of our products.